


S.28

SILENCIADORES RECTANGulares MÓDULO 280

TABLA DE SELECCIÓN PARA EL SILENCIADOR S.28

TABICA: 200 mm
PASO DE AIRE: 80mm




Selección rápida de Silenciadores

Seleccione el tipo en función del caudal y la pérdida de carga

VELOCIDAD (m/seg.)	5	7,5	10	12,5	15
PERDIDA (mm.c.d.a.)	1,2	2,5	5	7,5	10
Modelos (Anchox Alto)	CAUDAL DE AIRE m3/H.				
280x600	864	1.296	1.728	2.160	2.592
280x900	1.296	1.944	2.592	3.240	3.888
560x600-280x1.200	1.728	2.592	3.456	4.320	5.184
840x600-560x900	2.592	3.888	5.184	6.480	7.776
1.120x600-50x1.200	3.456	5.184	6.912	8.640	10.368
840x900	3.888	5.832	7.776	9.720	11.664
1.400x600-560x1.500	4.320	6.480	8.640	10.800	12.960
1.120x900-840x1.200-560x1.800	5.184	7.776	10.368	12.960	15.552
1.400x900-840x1.500	6.480	9.720	12.960	16.200	19.440
1.120x1.200	6.912	10.368	13.824	17.280	20.736
1.680x900-840x1.800	7.776	11.664	15.552	19.440	23.328
1.400x1.200-1.120x1.500	8.640	12.960	17.280	21.600	25.920
1.680x1.200-1.120x1.800	10.368	15.552	20.736	25.920	31.104
1.400x1.500	10.800	16.200	21.600	27.000	32.400
1.960x1.200	12.096	18.144	24.192	30.240	36.288
1.680x1.500-1.400x1.800	12.960	19.440	25.920	32.400	38.880
1.960x1.500	15.120	22.680	30.240	37.800	45.360
1.680x1.800	15.552	23.328	31.104	38.880	46.656
1.960x1.800	18.144	27.216	36.288	45.360	54.432



CARACTERÍSTICAS ACÚSTICAS DEL SILENCIADOR S.28

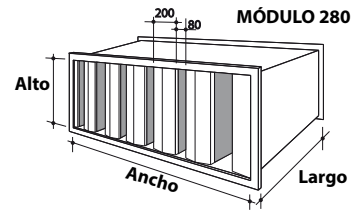


II. Pérdidas por inserción. Parámetro resultante de los ensayos homologados bajo norma UNE-EN ISO 11691:2010
 Ensayos realizados en LGAI. 08/2013.Expediente 7223



Pérdidas por frecuencia en función de la longitud

LONGITUD m/m	Pérdida de inserción (dB)						
	125 Hz	250 Hz	500 Hz	1 K Hz	2 K Hz	4 K Hz	8 K Hz
600	5.4	14.6	25.9	31.6	25.7	18.8	17.1
900	6.3	18.3	32.9	38.1	32.1	23.6	20.2
1.200	7.1	21.3	38.5	43.3	38.4	28.4	23.2
1.500	7.9	24.2	44.1	48.5	44.7	33.2	26.2
1.800	8.9	29.6	53.8	57.5	51.4	37.9	29.3
2.100	9.5	30.1	55.3	59.0	57.3	42.8	32.3
2.400	10.1	31.5	58.2	61.7	63.5	47.5	35.2

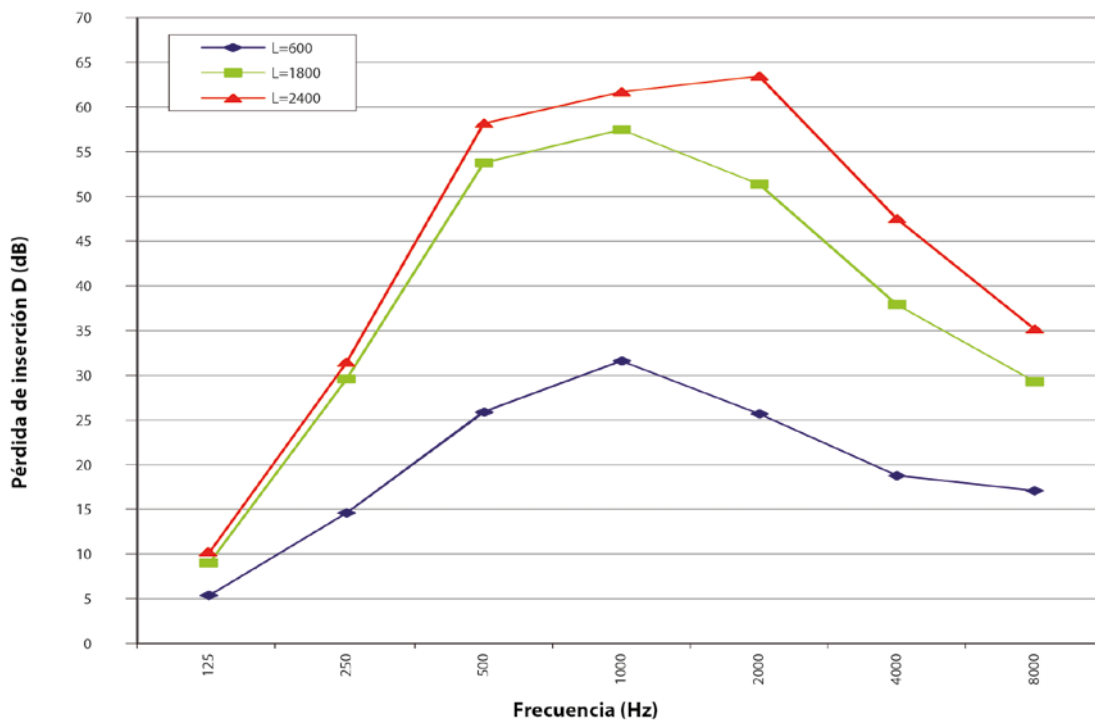

DETALLES DE CODIFICACIÓN Y PRECIOS DEL SILENCIADOR S.28



TABICA: 200 mm
PASO DE AIRE: 80mm

Detalles de codificación

S285609001200

Longitud (L)
Alto (A)
Ancho (B)
Módulo (S28⇒280)

Detalle de interior de tabica.

PRECIOS

LARGO (L)	ALTO (A)	NÚMERO DE MODULOS/ANCHO (B)						
		1	2	3	4	5	6	7
		280 (B)	560 (B)	840 (B)	1120 (B)	1400 (B)	1680 (B)	1960 (B)
600	600	402 €	466 €	551 €	762 €	826 €	1.058 €	1.205 €
600	900	479 €	565 €	713 €	862 €	960 €	1.242 €	1.439 €
600	1200	516 €	623 €	772 €	963 €	1.069 €	1.329 €	1.618 €
600	1500	640 €	771 €	903 €	1.118 €	1.333 €	1.590 €	1.889 €
600	1800	676 €	829 €	981 €	1.218 €	1.454 €	1.733 €	2.053 €
900	600	442 €	575 €	750 €	884 €	1.087 €	1.319 €	1.535 €
900	900	539 €	708 €	877 €	1.088 €	1.410 €	1.620 €	1.887 €
900	1200	632 €	831 €	1.156 €	1.312 €	1.581 €	1.823 €	2.119 €
900	1500	725 €	996 €	1.295 €	1.622 €	1.852 €	2.136 €	2.478 €
900	1800	864 €	1.172 €	1.478 €	1.868 €	2.133 €	2.453 €	2.830 €
1200	600	525 €	644 €	804 €	965 €	1.139 €	1.397 €	1.697 €
1200	900	651 €	817 €	981 €	1.216 €	1.450 €	1.713 €	2.059 €
1200	1200	703 €	907 €	1.124 €	1.399 €	1.728 €	1.975 €	2.360 €
1200	1500	817 €	1.067 €	1.344 €	1.693 €	2.111 €	2.374 €	2.820 €
1200	1800	894 €	1.197 €	1.528 €	1.943 €	2.442 €	2.716 €	3.215 €
1500	600	658 €	896 €	1.092 €	1.288 €	1.498 €	1.805 €	2.057 €
1500	900	821 €	1.023 €	1.309 €	1.596 €	1.910 €	2.211 €	2.511 €
1500	1200	909 €	1.210 €	1.539 €	1.939 €	2.225 €	2.583 €	3.023 €
1500	1500	1.045 €	1.454 €	1.821 €	2.283 €	2.748 €	3.129 €	3.620 €
1500	1800	1.166 €	1.623 €	2.163 €	2.690 €	3.161 €	3.589 €	4.116 €
1800	600	701 €	968 €	1.234 €	1.501 €	1.712 €	1.992 €	2.273 €
1800	900	930 €	1.223 €	1.515 €	1.863 €	2.268 €	2.602 €	2.865 €
1800	1200	1.043 €	1.413 €	1.825 €	2.264 €	2.690 €	3.101 €	3.597 €
1800	1500	1.178 €	1.647 €	2.060 €	2.613 €	3.110 €	3.566 €	4.105 €
1800	1800	1.312 €	1.839 €	2.407 €	2.962 €	3.601 €	4.100 €	4.641 €